

DIY Dutch Door for Chicken Coop



Materials:


- 2 - 1x4x10 cedar boards
- 4 - 1x6x6 cedar fence pickets
- 1" wafer head screws
- 2 sets of 3" t-hinges
- 2 gate latches
- Kreg jig
- 1 1/4" Kreg screws
- saw
- wood glue

Cut List:

- 4 - 1x4 @ 34 5/16"
- 4 - 1x4 @ 20 3/4"
- 12 - 1x6 fence pickets @ 27 3/4"


Step 1:

Build the frame of the door. You will build 2 of the frames pictured below. You will drill pocket holes 3/4" deep and use 1 1/4" screws to attach. Make sure and use wood glue as well. Letters ph in the picture denotes where pocket holes will be drilled.

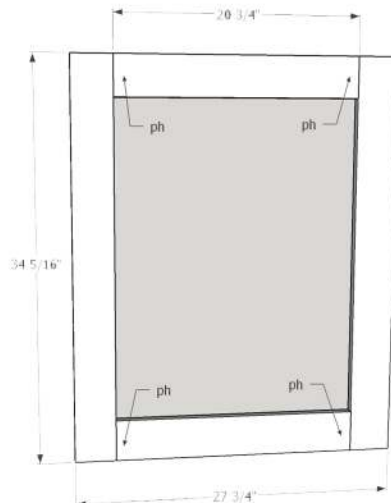


Step 2:

Using wood glue, screw 1x6 fence pickets cut @ 27 3/4" directly onto the backside of the frame. The boards will cover the frame and be flush with the edges.

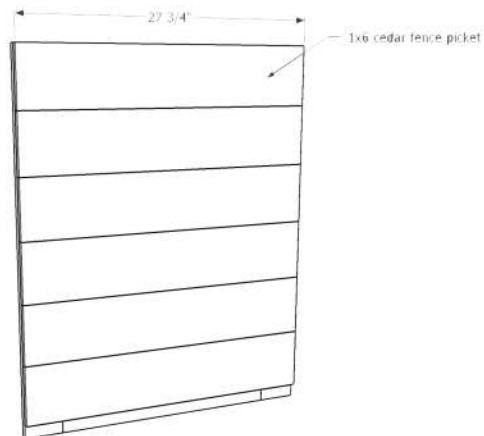

You can rip a board to cover that bottom space if you would like, I did not.

Here's the view from the front.

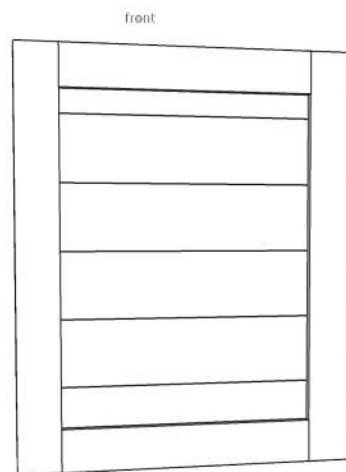

Add the hinges and gate latches to the door and then hang in door frame.