

DIY Shutters for Chicken Coop



Materials:


- 5 - 1x4x6' cedar fence pickets
- 6 - 1x6x6' cedar fence pickets
- 2 sets of 3" t-hinges
- 2 sets of hook and eye latches
- 1" wafer head screws
- 1" Kreg screws
- Kreg Jig
- saw
- drill
- wood glue

Cut List:

- 2 - 1x1 @ 45"
- 4 - 1x4 @ 44 3/4"
- 4 - 1x4 @ 13 7/8"
- 16 - 1x6 @ 20 7/8"


Step 1:

Build the frame for the shutter. You will build two of the frames shown below. Using pocket holes drilled at 1/2" depth and 1" screws to attach. Make sure and use wood glue as well. Letters ph below are to denote where pocket holes are to be drilled! See post for more info.

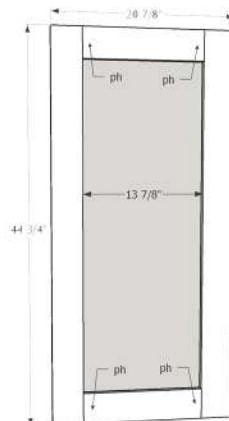

Step 2:

Screw the 1x6 boards to the back of the frame, they should cover the frame and be flush with the outside edges. Using wood glue and 1" screws, just screw them directly into the frame.

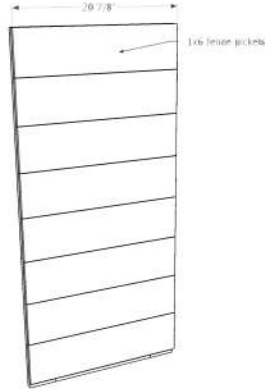

Step 3:

Once your shutters are built, add the 1x1 strip to the outside edge of the window frame. I just screwed through the front of the board and through the window frame, make sure and use at least 2" screws.



Step 4:

Attach hinges to the shutters and then to the boards we placed in step 3.



See post for more information!

<https://theinspiredworkshop.com/diy-shutters-for-chicken-coop/>